

# NITE BRITES


JOB NAME \_\_\_\_\_

TYPE \_\_\_\_\_

## WPG-SMALL GLASS WALL PACK

50-100 watt Metal Halide  
50-150 watt High Pressure Sodium  
26-42 watt Compact Fluorescent

The WPG has a slim design that is excellent for security, and perimeter lighting in areas such as building facades, entrance ways, garage doors, and alleys.

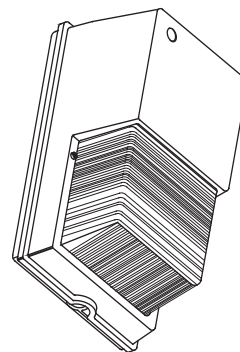

**Day-Brite® Lighting**

### ORDERING MATRIX

SAMPLE CATALOG NUMBER: WPG100MMT-LP

WPG				
<b>FAMILY</b> WPG		<b>LAMP SOURCE</b> M - Metal Halide S - High Pressure Sodium C - Compact Fluorescent Single Lamp D - Compact Fluorescent Dual Lamp		<b>OPTIONS (add as suffix)</b> LP - Lamp with fixture PE - Photo Control (not available in 480V)
	<b>WATTAGE</b> 050 - 50 070 - 70 100 - 100 150 - 150 <sup>2</sup> 26C - 26CFL <sup>72</sup> 32C - 32CFL <sup>72</sup> 42C - 42CFL <sup>72</sup>		<b>VOLTAGE</b> 12 - 120 20 - 208 24 - 240 27 - 277 48 - 480 MT - 120/208 240/277 U - Universal 108-305 volts 50Hz or 60Hz <sup>72</sup>	

#### Footnotes:

<sup>2</sup>High Pressure Sodium only.  
<sup>72</sup>Compact Fluorescent only.

#### General Notes:

All options are factory installed.  
Medium Base lamp only.  
GX24q Lamp Base for Compact Fluorescent.  
All accessories are field installed.


**Warning:** Refer to and follow the lamp manufacturer's warnings and instructions.

### ACCESSORIES (order separately)

WGWPG - Wire Guard  
RDA-WLP - Replacement Door Assembly

(For additional descriptions of Wall Light accessories refer to sheet number OA-50030.)

### DIMENSIONS

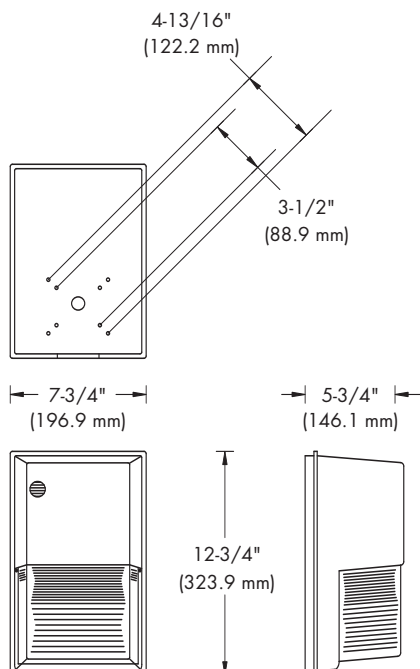

### ENERGY DATA

#### HIGH PRESSURE SODIUM

HX-HPF BALLAST INPUT WATTS  
50 watt-66 watts  
70 watt-91 watts  
100 watt-130 watts  
150 watt-188 watts

#### METAL HALIDE

HX-HPF BALLAST INPUT WATTS  
50 watt-72 watts  
70 watt-90 watts  
100 watt-129 watts

#### COMPACT FLUORESCENT


26 watt-29 watts  
32 watt-36 watts  
42 watt-48 watts

**WEIGHT = 12 lbs. (max.)**

WPG-SMALL GLASS WALL PACK

**WL-43115**

## PHOTOMETRICS

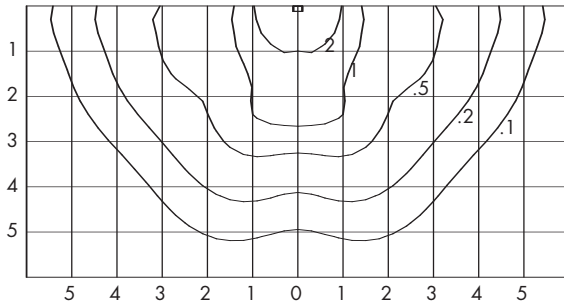

UNITS SHOWN IN TERMS OF MOUNTING HEIGHT  
INITIAL FOOTCANDLES SHOWN

CATALOG NUMBER: WPG100M  
TEST NUMBER: 24875  
LAMP: METAL HALIDE  
WATTAGE: 100  
LUMENS: 9,000  
TILT ANGLE: 0°  
MOUNTING HEIGHT: 10 FEET

LIGHT LEVEL MULTIPLYING FACTORS	
MOUNTING HEIGHT	MULTIPLIER
20'	0.25
15'	0.44
12'	0.69
10'	1.00
8'	1.56


### ADDITIONAL TEST NUMBERS

DESCRIPTION/CATALOG NUMBER	TEST NUMBER
WPG050S	24872P
WPG070S	248722
WPG100S	24873P
WPG150S	24873
WPG050M	24876P
WPG070M	24876

## PRODUCT FEATURES

UL 1598 Listed wet location, and 25°C ambient for all lamp wattages listed.

1. Heavy duty two piece, die cast aluminum housing.
2. Button photo control is optional.
3. Silicone gasketing provides protection against moisture.
4. Mounts directly to 3-1/2" octagon or 4" square outlet box.
5. 1/2" NPS tapped holes provided at bottom and back of the luminaire for surface conduit entry.
6. Anodized aluminum reflector.
7. Dark bronze polyester powder finish for impact, corrosion and UV resistance.
8. Clear prismatic borosilicate glass refractor is thermal and shock resistant.

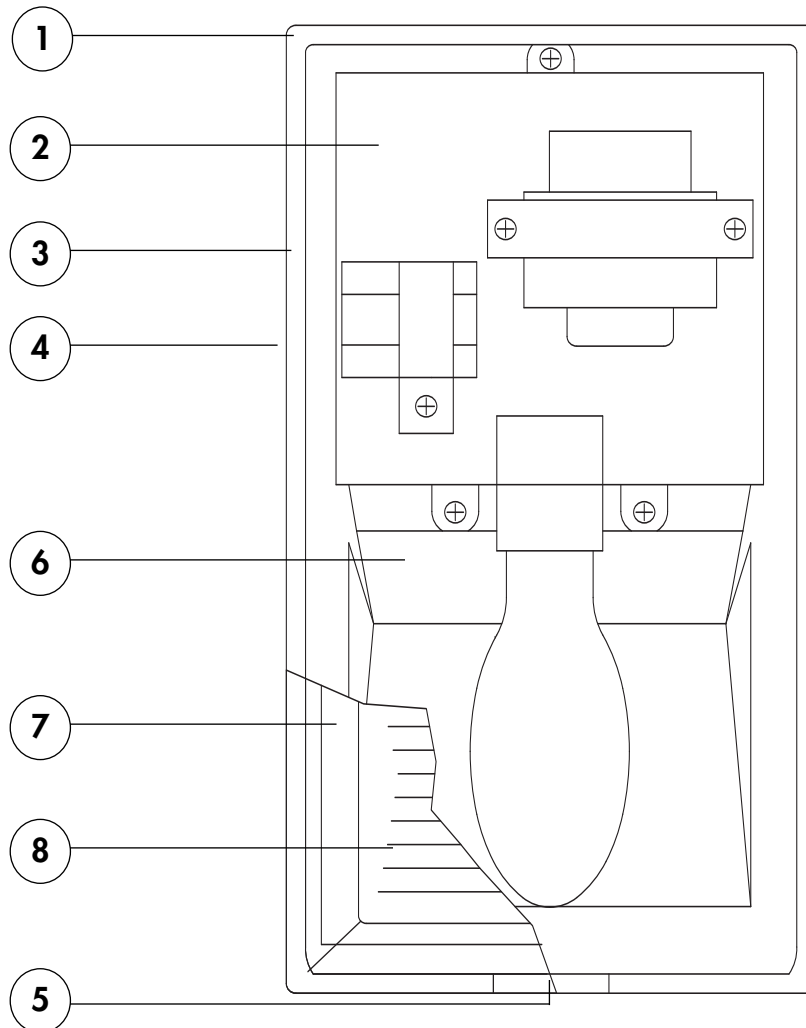

Visit our web site at [www.daybritelighting.com](http://www.daybritelighting.com)

776 South Green Street Tupelo, MS 38804 Phone: 662-842-7212 Fax: 662-841-5501

**WL-43115**

189 Bullock Drive Markham, Ontario Canada L3P 1W4 Phone: 905-294-9570 Fax: 905-294-8911  
Day-Brite Lighting reserves the right to make changes without notice. ©March 2005. DB500.0305  
Day-Brite Lighting is a Genlyte Company.

 **Day-Brite® Lighting**